




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: H02K 3/40		A1	(11) International Publication Number: WO 97/45925
			(43) International Publication Date: 4 December 1997 (04.12.97)
(21) International Application Number: PCT/SE97/00887 (22) International Filing Date: 27 May 1997 (27.05.97) (30) Priority Data: 9602079-7 29 May 1996 (29.05.96) SE (71) Applicant (for all designated States except US): ASEA BROWN BOVERI AB [SE/SE]; S-721 83 Västerås (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): LEIJON, Mats [SE/SE]; Hyvrlargatan 5, S-723 35 Västerås (SE). GERTMAR, Lars [SE/SE]; Humlegatan 6, S-722 26 Västerås (SE). BRANDT, Lennart [SE/SE]; Vasagatan 26B, S-722 15 Västerås (SE). (74) Agent: KARLSSON, Leif; L.A. Groth & Co. KB, P.O. Box 6107, S-102 32 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, ES, FI, FI (Utility model), GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: HIGH-VOLTAGE PLANTS WITH ELECTRIC MOTORS

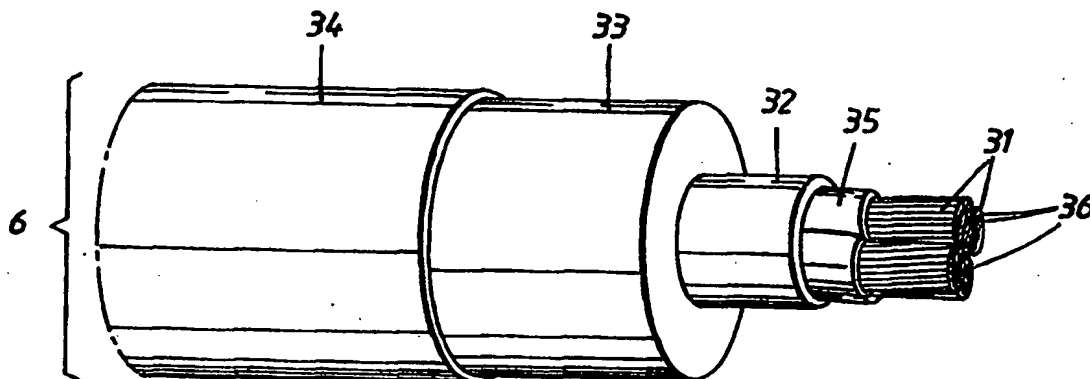

(57) Abstract

In a plant comprising one or more electric machines constructed with insulated conductors and connected for heavy current via insulated conductors, the magnetic circuit in at least one of these electric machines is connected directly to a high supply voltage of 20 - 800 kV, preferably higher than 36 kV. The insulation of the electric machine is built up of a cable (6) placed in its winding and comprising one or more current-carrying conductors (31) with a number of strands (36) surrounded by outer and inner semiconducting layers (34, 32) and intermediate insulating layers (33). The conductors (31) may be group-wise connected in parallel and semiconducting layers are therefore not required around every conductor in the group. If the conductors (31) are connected in series with each other within the group a part insulation (35) is required which will withstand a few kV, whereas connection of the conductors (31) to every phase requires a strong part insulation (35) which will withstand the phase voltage of the high-voltage supply network.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

HIGH-VOLTAGE PLANTS WITH ELECTRIC MOTORS

Technical field:

The present invention relates to electric plants comprising motors
5 intended for connection to distribution or transmission networks,
hereinafter termed power networks. The invention relates secondly
to a motor intended for use in such a plant. The motors may be
either synchronous or asynchronous motors.

The plant with electric motors may be a rolling mill, paper mill,
10 pulp drying machine, mine plant, quay structure, fan, pump or
compressor systems, hoisting means, traverse, crane, centrifuge,
conveyor, workshop plant, steel mills, etc. Plants with electric
motors shall thus be understood in their widest sense.

Background art:

15 The magnetic circuits in electric motors usually comprise a
laminated core, e.g. of sheet steel with a welded construction. To
provide ventilation and cooling the core is often divided into
stacks with radial and/or axial ventilation ducts. For larger
motors the laminations are punched out in segments which are
20 attached to the frame of the machine, the laminated core being held
together by pressure fingers and pressure rings. The winding is
disposed in slots in the laminated core, the slots generally having
a cross section in the shape of a rectangle or trapezium.

In multi-phase electric motors the windings are made as either
25 single or double layer windings. With single layer windings there
is only one coil side per slot, whereas with double layer windings
there are two coil sides per slot. By coil side is meant one or
more conductors combined vertically or horizontally and provided
with a common coil insulation, i.e. an insulation designed to
30 withstand the rated voltage of the motor to earth.

Double-layer windings are generally made as diamond windings
whereas single layer windings in the present context can be made as
diamond or flat windings. Only one (possibly two) coil width
exists in diamond windings whereas flat windings are made as
35 concentric windings, i.e. with widely varying coil width. By coil
width is meant the distance in arc dimension between two coil sides
pertaining to the same coil.

Normally all large motors are made with double-layer winding and
coils of the same size. Each coil is placed with one side in one

layer and the other side in the other layer. This means that all coils cross each other in the coil end. If there are more than two layers these crossings complicate the winding work and the coil end is less satisfactory.

- 5 It is considered that coils for rotating electric motors can be manufactured with good results up to a voltage range of 10 - 20 kV.
- Large alternating current motors are divided into synchronous and asynchronous motors, the former generally covering a higher power range up to a few tens of MW and being constructed to be supplied
- 10 with a voltage of normally maximally 20 kV. The synchronous motor operates with a rotor speed that is synchronous with the network frequency. In an asynchronous motor the magnetic field rotates faster than the rotor so that the induced currents will provide torque in the direction of rotation. The two types of motors are
- 15 to a great extent similar in construction. They consist of a stator with a rotor placed inside the stator. The stator is built up of a laminated core with slots punched out for the winding. The stator is placed in a bottom box attached to the foundation by its feet. The rotor is suspended in bearings mounted on the box. A
- 20 stator shell is placed on the bottom box to protect the active parts. The shell is provided with openings for cooling air to enter.

The function of an alternating current motor is based on interaction between magnetic fields, electric currents and

25 mechanical motion. The magnetic fields are localized primarily in the iron of the machine and the electric currents are localized in the windings.

A distinction is made between two main types of alternating current motors: synchronous and asynchronous machines. The principal

30 difference between synchronous and asynchronous machines is how the torque is produced. A synchronous motor is excited by supplying energy to the rotor from the outside via brushless exciters or slip rings, whereas an asynchronous motor obtains its excitation energy from the stator current through induction. The speed of the

35 synchronous motor is therefore not as dependent on load as in the asynchronous motor.

Depending on the construction of the rotor, there are two types of synchronous motors: those with salient poles and those with a cylindrical rotor. In high-speed 2-pole operation the mechanical

40 stresses on the rotor will be extremely high and in that case it is favourable to use a cylindrical rotor. For motors with lower speeds, four-pole or more, the rotor diameter will be larger. In

view of the lower speed and thus correspondingly lower mechanical stresses, it is more favourable for the rotor to have salient poles.

The boundary between the two types is indefinite. At higher power and with four poles, cylindrical rotors are used that are long and slim in shape. At lower power and with four poles, rotors with salient poles are used.

Asynchronous motors are also divided into two types: squirrel-cage induction motors or slip ring motors. Common to both types is that the rotor is built up of laminations with slots for the rotor winding. The difference is in the construction of the winding. The squirrel-cage induction motors have a squirrel-cage winding consisting of axial rods that are short-circuited at the ends with a short-circuiting ring. Asynchronous motors with slip rings have a three-phase winding in the rotor with phase terminals connected to the slip rings.

By designing the rotor slots in various ways the start and operating properties of the squirrel-cage induction motor can be adjusted to various operating requirements. Slip-ring asynchronous motors are primarily used under difficult starting conditions. External resistance can be connected via the slip rings. By increasing the rotor resistance the maximum torque can be moved towards lower speed, thus increasing the start torque. When starting is complete the external start resistance is short-circuited.

The choice of a large alternating current motor as regards to type, nesting class and cooling method, is dependent on the following factors, among others:

- Torque characteristic of the load
- Type of load and load cycle
- Start power restrictions
- Network characteristics
- Cost of electric energy
- Environment where the motor is to be installed
- Investment cost in relation to the estimated service life of the plant

The main desire for an electric machine is that its capital cost and running costs shall be as low as possible. It is therefore desirable to keep the efficiency as high as possible at given power

factors. The synchronous motor generally has higher efficiency than the asynchronous motor.

The rotor of a synchronous motor is often manufactured with salient poles. Its main use is in the power range of 1 MW to a few tens of 5 MW, e.g. for grinding mills and refiners in the paper industry, for large pumps both in the process industry and in connection with weak networks, e.g. for irrigation installations in desert countries. The oil industry also uses large synchronous motors for pumps and compressors.

- 10 The main reason for using synchronous motors instead of the less expensive asynchronous motors is that the synchronous motor produces less stress on the network, in the form of lower start current, and that at over-excitation the synchronous motor can also be used to improve the power factor. Large synchronous motors may 15 also have slightly higher efficiency than equivalent asynchronous motors.

The winding must be insulated, both between the winding turns in the coil and also between coil and surroundings. Various forms of plastic, varnish and glassfibre material are often used as 20 insulating material. The coil ends are braced in order to counteract the forces appearing between the various coils, particularly at short-circuiting.

Motors of the type described above are connected to high-voltage networks of e.g. 145 kV through the use of a transformer which 25 lowers the voltage. The use of a motor in this way, connected to the high-voltage network via a transformer entails a number of drawbacks. Among others the following drawbacks may be mentioned.

- the transformer is expensive, increases transport costs and requires space
- 30 • the transformer lowers the efficiency of the system
- the transformer consumes reactive power
- a conventional transformer contains oil, with the associated risks
- involves sensitive operation since the motor, via the 35 transformer, works against a weaker network.

Description of the invention:

An object of the invention is therefore to enable the use of one or more electric motors in a plant which is directly connected to high-voltage supply networks, by which is meant here sub-

transmission and distribution networks without intermediate connection of a transformer.

The benefit gained by attaining the above-mentioned object is the avoidance of an intermediate oil-filled transformer, the reactance
5 of which otherwise consumes reactive power.

This object is achieved according to the invention in that a plant of the type described in the preamble to claim 1 is given the special features defined in the characterizing part of this claim., and in that an electric motor of the type described in the preamble
10 to claim 25 is given the special features defined in the characterizing part of this claim.

Thanks to the specially produced solid insulation, the motors in such a plant can be supplied directly with a voltage level considerably in excess of what is possible using known technology,
15 and at a voltage that may reach the highest applicable voltages for high-voltage power networks.

The advantage is thus gained that the transformer becomes superfluous, therefore eliminating all the problems touched upon above that are inherent with a plant in which the voltage must be
20 stepped down, as well as other significant advantages. With a plant according to the invention the overload capacity is also radically increased. This may be +100 % for an hour or two, enabling motors with lower rated output to be selected, thereby also saving expense.

25 Higher output is also obtained through a high voltage on the motors since this is proportional to the voltage squared. The invention thus enables electric motors with higher power to be achieved. The invention thus extends the application area for electric machines to the range 1-300 MW and even enables applications at still higher
30 power levels.

The major and essential difference between known technology and the embodiment according to the invention is thus that this is achieved with a magnetic circuit included in at least one electric motor which is arranged to be directly connected to a high supply voltage
35 via coupling elements such as breakers and isolators. The magnetic circuit thus comprises one or more laminated cores. The winding consists of a threaded cable with one or more permanently insulated conductors having a semiconducting layer both at the conductor and outside the insulation, the outer semiconducting layer being
40 connected to earth potential.

To solve the problems arising with direct connection of electric motors, both rotating and static motors, to all types of high-voltage power networks, at least one motor in the plant according to the invention has a number of features as mentioned above, which
5 differ distinctly from known technology. Additional features and further embodiments are defined in the dependent claims and are discussed in the following.

The features mentioned above and other essential characteristics of the plant and at least one of the electric motors included therein
10 according to the invention, include the following:

- The winding is produced from a cable having one or more permanently insulated conductors with a semiconducting layer at both conductor and sheath. Some typical conductors of this type are PEX cable or a cable with EP rubber insulation which, however,
15 for the present purpose are further developed both as regards the strands in the conductor and the nature of the outer sheath. PEX = crosslinked polyethylene (XLPE). EP = ethylene propylene.
- Cables with circular cross section are preferred, but cables with some other cross section may be used in order to obtain
20 better packing density, for instance.
- Such a cable allows the laminated core to be designed according to the invention in a new and optimal way as regards slots and teeth.
- The winding is preferably manufactured with insulation in
25 steps for best utilization of the laminated core.
- The winding is preferably manufactured as a multi-layered, concentric cable winding, thus enabling the number of coil-end intersections to be reduced.
- The slot design is suited to the cross section of the
30 winding cable so that the slots are in the form of a number of cylindrical openings running axially and/or radially outside each other and having an open waist running between the layers of the stator winding.
- The design of the slots is adjusted to the relevant cable
35 cross section and to the stepped insulation of the winding. The stepped insulation allows the magnetic core to have substantially constant tooth width, irrespective of the radial extension.
- The above-mentioned further development as regards the strands entails the winding conductors consisting of a number of
40 impacted strata/layers, i.e. insulated strands that from the point

of view of an electric machine, are not necessarily correctly transposed, uninsulated and/or insulated from each other.

- The above-mentioned further development as regards the outer sheath entails that at suitable points along the length of the conductor, the outer sheath is cut off, each cut partial length being connected directly to earth potential.

The use of a cable of the type described above allows the entire length of the outer sheath of the winding, as well as other parts of the plant, to be kept at earth potential. An important advantage is that the electric field is close to zero within the coil-end region outside the outer semiconducting layer. With earth potential on the outer sheath the electric field need not be controlled. This means that no field concentrations will occur either in the core, in the coil-end regions or in the transition between them.

The mixture of insulated and/or uninsulated impacted strands, or transposed strands, results in low stray losses.

The cable for high voltage used in the winding is constructed of an inner core/conductor with a plurality of strands, at least two semiconducting layers, the innermost being surrounded by an insulating layer, which is in turn surrounded by an outer semiconducting layer having an outer diameter in the order of 10-250 mm and a conductor area in the order of 40-3000 mm².

If at least one of the motors in the plant according to the invention is constructed in the manner specified, start and control of this motor or these motors can be achieved with the start methods, known per se, described by way of example in the literature discussed in the introduction.

According to a particularly preferred embodiment of the invention, at least two of these layers, preferably all three, have the same coefficient of thermal expansion. The decisive benefit is thus gained that defects, cracks and the like are avoided during thermal movement in the winding.

According to another important preferred embodiment of the invention at least one of the motors in the plant has one or more connection voltages.

From another aspect of the invention, the object stated has been achieved in that a plant of the type described in the preamble to claim 23 is given the special features defined in the characterizing part of this claim.

Since the insulation system, suitably permanent, is designed so that from the thermal and electrical point of view it is dimensioned for over 36 kV, the plant can be connected to high-voltage power networks without any intermediate step-down transformer, thereby achieving the advantages referred to. Such a plant is preferably, but not necessarily, constructed to include the features defined for plants as claimed in any of claims 1-22.

The above-mentioned and other advantageous embodiments of the invention are defined in the dependent claims.

10 Brief description of the drawings:

The invention will be described in more detail in the following detailed description of a preferred embodiment of the construction of the magnetic circuit of an electric motor in the plant, with reference to the accompanying drawings in which

15 Figure 1 shows a schematic axial end view of a sector of the stator in an electric motor in the plant according to the invention,

Figure 2 shows an end view, step-stripped, of a cable used in the winding of the stator according to Figure 1, and

20 Figures 3-7 show examples of different start circuits known per se.

Description of a preferred embodiment:

In the schematic axial view through a sector of the stator 1 according to Figure 1, pertaining to the electric motor or motors included in the plant, the rotor 2 of the motor is also indicated.

25 The stator 1 is composed in conventional manner of a laminated core. Figure 1 shows a sector of the motor corresponding to one pole pitch. From a yoke part 3 of the core situated radially outermost, a number of teeth 4 extend radially in towards the rotor 2 and are separated by slots 5 in which the stator winding is arranged. Cables 6 forming this stator winding, are high-voltage

30 cables which may be of substantially the same type as those used for power distribution, i.e. PEX cables. One difference is that the outer, mechanically-protective sheath, and the metal screen normally surrounding such power distribution cables are eliminated so that the cable for the present application comprises only the conductor and at least one semiconducting layer on each side of an insulating layer. Thus, the semiconducting layer which is sensitive to mechanical damage lies naked on the surface of the cable.

The cables 6 are illustrated schematically in Figure 1, only the conducting central part of each cable part or coil side being drawn in. As can be seen, each slot 5 has varying cross section with alternating wide parts 7 and narrow parts 8. The wide parts 7 are substantially circular and surround the cabling, the waist parts between these forming narrow parts 8. The waist parts serve to radially fix the position of each cable. The cross section of the slot 5 also narrows radially inwards. This is because the voltage on the cable parts is lower the closer to the radially inner part of the stator 1 they are situated. Slimmer cabling can therefore be used there, whereas coarser cabling is necessary further out. In the example illustrated cables of three different dimensions are used, arranged in three correspondingly dimensioned sections 51, 52, 53 of slots 5.

Figure 2 shows a step-wise stripped end view of a high-voltage cable for use in an electric motor according to the present invention. The high-voltage cable 6 comprises one or more conductors 31, each of which comprises a number of strands 36 which together give a circular cross section of copper (Cu), for instance. These conductors 31 are arranged in the middle of the high-voltage cable 6 and are surrounded in the embodiment shown by a part insulation 35. However, it is feasible for the part insulation 35 to be omitted on one of the conductors 31. In the present embodiment of the invention the conductors 31 are together surrounded by a first semiconducting layer 32. Around this first semiconducting layer 32 is an insulating layer 33, e.g. PEX insulation, which is in turn surrounded by a second semiconducting layer 34. Thus the concept "high-voltage cable" in this application need not include any metallic screen or outer sheath of the type that normally surrounds such a cable for power distribution.

Figures 3-7, in the form of basic diagrams, show examples of known start procedures applicable to rotating motors in the plant according to the present invention. The following designations are used in the figures:

U:	High-voltage network	X_t	Transformer impedance
X_n	Network impedance	R:	Reactor
B:	Breaker	X_r	Reactor impedance
M:	Motor	C:	Capacitor
X_m	Motor impedance	X_c	Capacitor impedance

T: Transformer

L: 3-phase stator windings

Figure 3 thus relates to the procedure for transformer start, Figure 4 to the procedure for reactor start, Figure 5 to the procedure for part-winding start, Figure 6 to the procedure for capacitor start, and Figure 7 to the procedure for combined reactor and capacitor start. Other combinations of start procedures are of course also applicable in the plant according to the invention. The various start procedures are described in the literature, e.g. in the literature references mentioned in the introduction of this application.

Thus, with one or more rotating electric motors constructed in accordance with the invention, industrial plants comprising one or more such motors can be connected directly to high-voltage supply networks, i.e. networks having supply voltages of 20 kV or higher, thereby enabling the eliminated of at least one transformer.

Using permanent insulating power cable according to the invention, between the electric motors included in the plant, and achieving a compact siting of these motors thus ensures that the electric fields are small and bushings/terminals can be entirely eliminated.

CLAIMS

1. An electric plant for high voltage consisting of one or more motors, each comprising at least one winding, characterized in that the winding of at least one of the electric motors comprises an insulation system comprising at least two semiconducting layers, each layer constituting essentially an equipotential surface, and intermediate solid insulation between the layers.
2. A plant as claimed in claim 1, characterized in that at least one motor has one or more connection voltages.
3. A plant as claimed in claim 1 or 2, characterized in that at least one of the layers has substantially the same coefficient of thermal expansion as the solid insulation.
4. A plant as claimed in any of claims 1-3, characterized in that all transformation of substantial power is arranged to take place in the same electric motor.
5. A plant as claimed in any of claims 1-4, characterized in that the insulation is built up of a cable (6) intended for high voltage, comprising one or more current-carrying conductors (31) surrounded by at least two semiconducting layers (32, 34) with intermediate insulating layers (33) of solid insulation.
6. A plant as claimed in claim 5, characterized in that the innermost semiconducting layer (32) is at substantially the same potential as the conductor(s) (31).
7. A plant as claimed in either claim 5 or claim 6, characterized in that one of the outer semiconducting layers (34) is arranged to form essentially an equipotential surface surrounding the conductor(s) (31).
8. A plant as claimed in claim 7, characterized in that said outer semiconducting layer (34) is connected to a predefined potential.
9. A plant as claimed in claim 8, characterized in that the predefined potential is earth potential.
10. A plant as claimed in any of claims 5-9, characterized in that at least two of said layers have substantially the same coefficient of thermal expansion.

11. A plant as claimed in any of claims 5-7, characterized in that the current-carrying conductor comprises a plurality of strands, only a few of the strands not being insulated from each other.
- 5 12. A plant as claimed in any of claims 1-11, characterized in that the winding consists of a cable comprising one or more current-carrying conductors (2), each conductor consisting of a number of strands, an inner semiconducting layer (3) being arranged around each conductor, an insulating layer (4) of solid
10 insulation being arranged around each inner semiconducting layer (3) and an outer semiconducting layer (5) being arranged around each insulating layer (4).
13. A plant as claimed in claim 12, characterized in that the cable also comprises a metal screen and a sheath.
- 15 14. A plant as claimed in any of the preceding claims, characterized in that the stator of the motor is cooled at earth potential by means of a flow of gas and/or liquid.
15. A plant as claimed in any of the preceding claims, characterized in that the high-voltage cables (6) have a
20 conductor area of between 40 and 3000 mm² and have an outer cable diameter of between 10 and 250 mm.
16. A plant as claimed in any of the preceding claims, characterized in that the start current and/or fault or current for the rotating electric motor(s) is arranged to be
25 limited by an electric static machine, i.e. a reactor/inductor, which is temporarily and/or permanently connected in series with the armature winding of the rotating electric machine (Figure 4).
17. A plant as claimed in any of the preceding claims, characterized in that the neutral point of at least one
30 motor is earthed via an impedance.
18. A plant as claimed in any of the preceding claims, characterized in that the neutral point of at least one motor is directly connected to earth.
19. A plant as claimed in any of the preceding claims,
35 characterized in that the motor is arranged to operate as producer of reactive power with temporarily large overload capacity.
20. A plant as claimed in any of the preceding claims, characterized in that the motor is arranged to be
40 connected to a distribution network or transmission network via

coupling elements and without any step-down transforming of the voltage level.

21. A plant as claimed in any of the preceding claims, characterized in that the motor is arranged to be
5 connected to a distribution network or transmission network having a supply voltage in excess of 36 kV.

22. A plant as claimed in any of the preceding claims, characterized in that the winding of the motor is arranged for self-regulating field control and lacks auxiliary
10 means for control of the field.

23. An electric plant for high voltage consisting of one or more motors, each of which comprises at least one winding, characterized in that the winding of at least one of the electric motors comprises an insulation system which, as regards
15 its thermal and electrical properties, permits a voltage level in excess of 36 kV.

24. An electric plant as claimed in claim 23, characterized in that said motors includes the features defining the plant claimed in any of claims 1-21.

20 25. An electric motor comprising at least one winding, characterized in that the winding comprises an insulation layer including at least two semiconducting layers, each semi-conductor layer constituting essentially an equipotential surface, and intermediate solid insulation.

25 26. A motor as claimed in claim 25, characterized in that its stator winding is divided into two parts in order to achieve partial winding start.

27. A motor as claimed in claim 25 or claim 26, characterized in that it has one or more connection
30 voltages.

28. A motor as claimed in any of claims 25-27, characterized in that it includes the features defined for the motor in the plant as claimed in any of claims 2-24.

THIS PAGE BLANK (USPTO)

1 / 3

Fig. 1


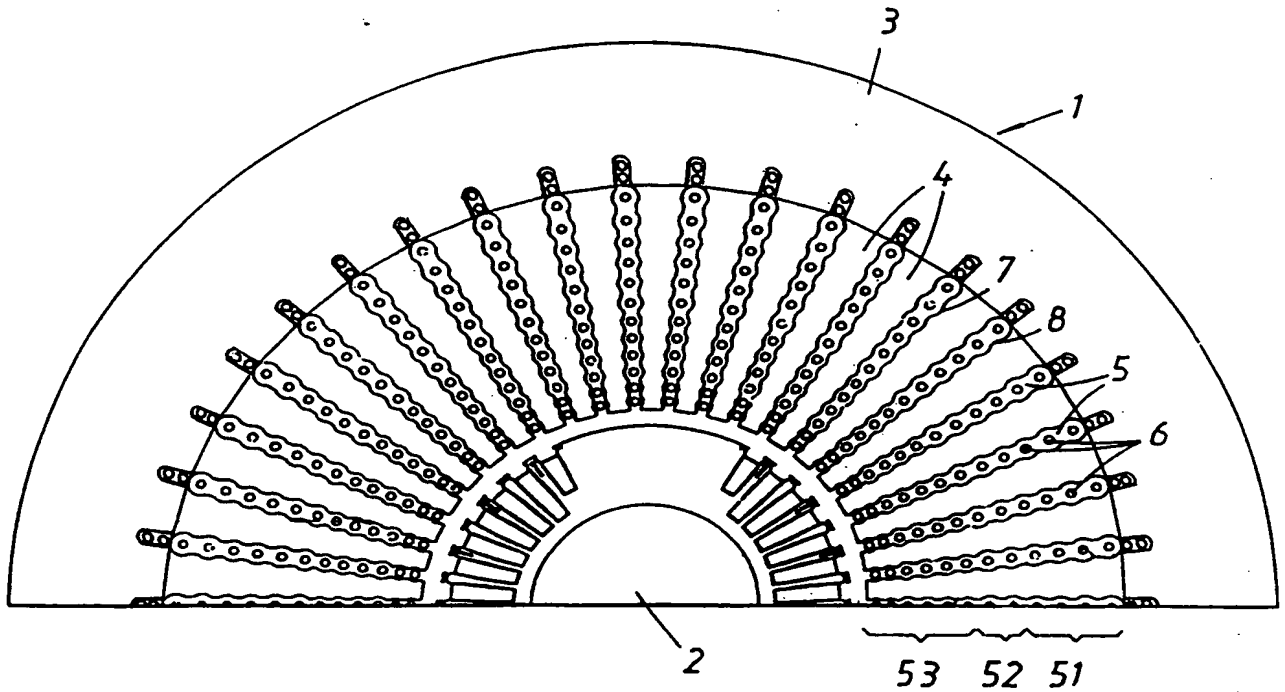


Fig. 2

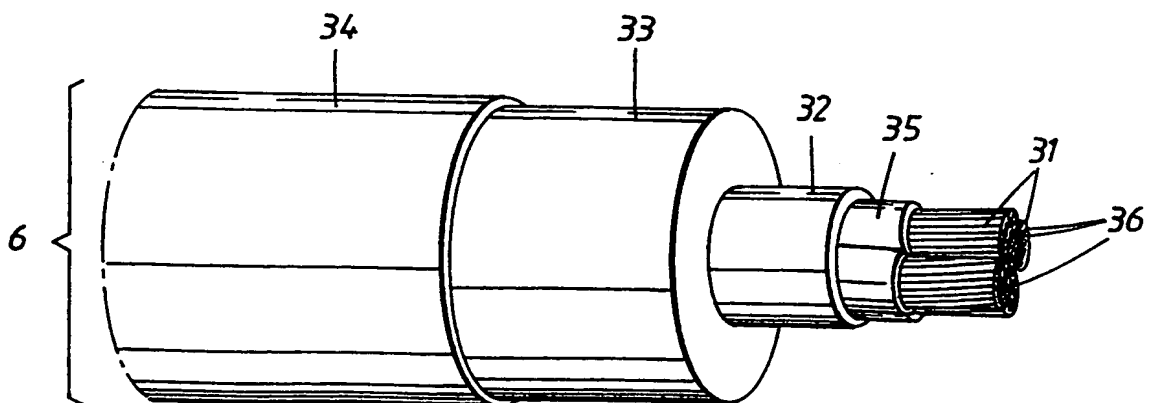

THIS PAGE BLANK (USPTO)

2 / 3

Fig. 3

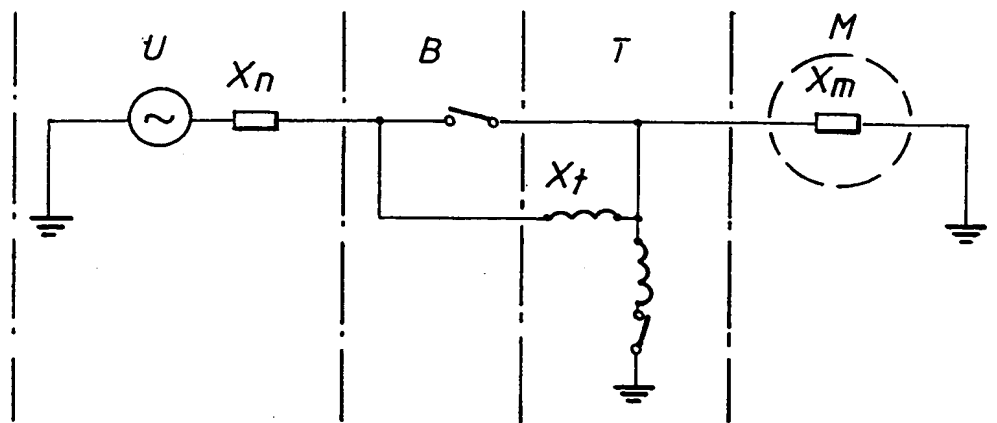


Fig. 4


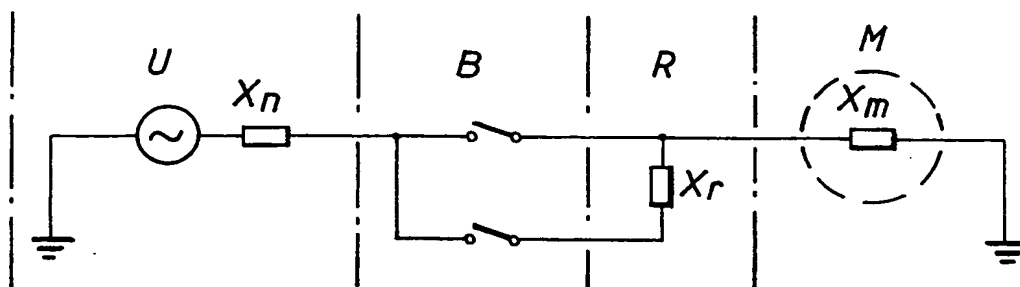


Fig. 5

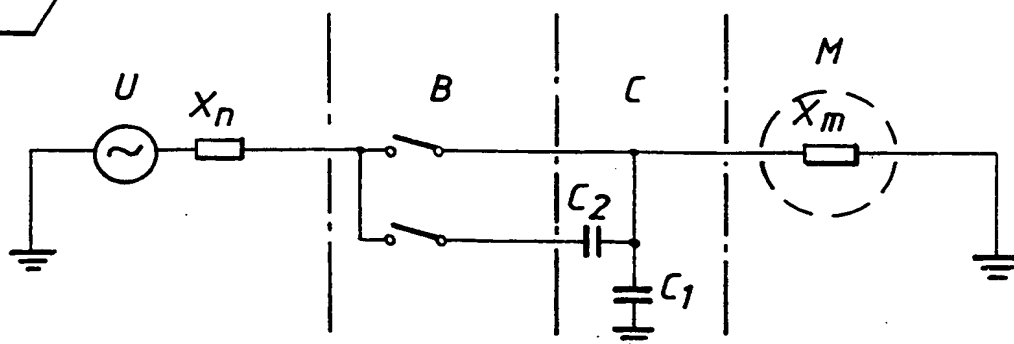

THIS PAGE BLANK (USPTO)

3 / 3

Fig. 5


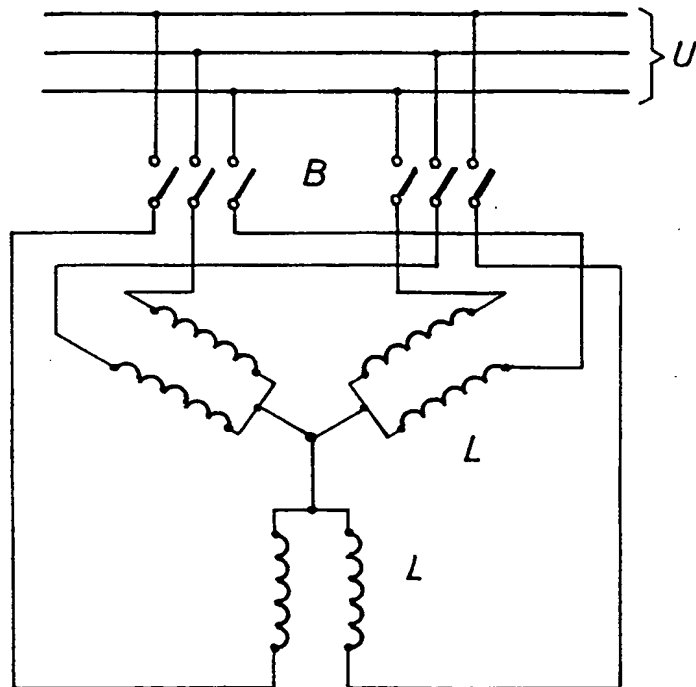


Fig. 7

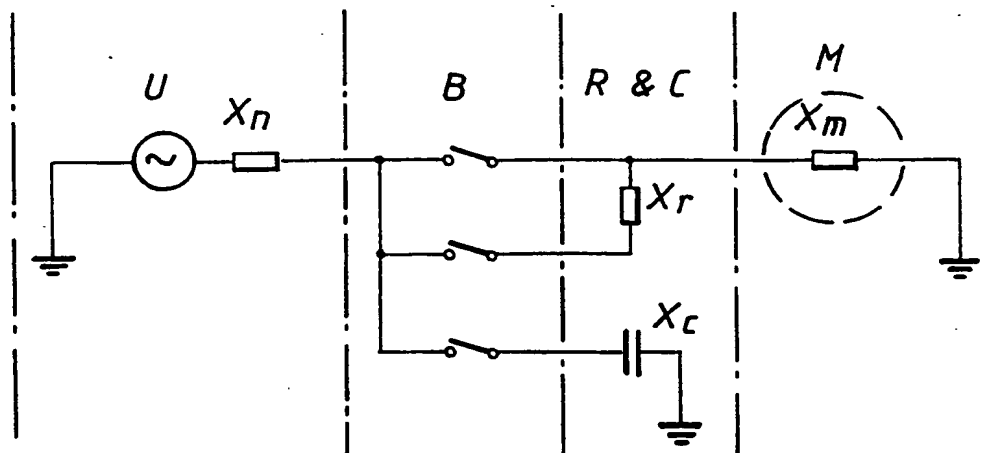

THIS PAGE BLANK (USPTO)

IOTEROATIOAL SEARCH REPRT

International application No.

PCT/SE 97/00887

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H02K 3/40

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5036165 A (RICHARD K. ELTON ET AL.), 30 July 1991 (30.07.91), see the whole document --	1-22,24-28
A	US 4429244 A (NIKITIN ET AL), 31 January 1984 (31.01.84), column 1, line 10 - line 58 --	1-22,24-28
A	SE 453236 B (ELIN-UNION AG FÜR ELEKTRISCHE INDUSTRIE), 18 January 1988 (18.01.88), abstract --	1-22,24-28
A	US 4091139 A (QUIRK), 23 May 1978 (23.05.78), abstract -- -----	1-22,24-28

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

- * Special categories of cited documents
- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed
- * "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- * "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- * "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- * "&" document member of the same patent family

Date of the actual completion of the international search

8 Sept. 1997

Date of mailing of the international search report

23. 09. 1997

Name and mailing address of the ISA/
Swedish Patent Office
B x 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Magnus Hjalmarsson
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/09/97

International application No.
PCT/SE 97/00887

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5036165 A	30/07/91	US 5066881 A US 5067046 A CA 1245270 A US 4853565 A	19/11/91 19/11/91 22/11/88 01/08/89
US 4429244 A	31/01/84	CA 1167898 A CH 663120 A,B DE 3050139 T FR 2473804 A,B GB 2081523 A,B JP 56501707 T SU 961048 A WO 8101775 A	22/05/84 13/11/87 25/03/82 17/07/81 17/02/82 19/11/81 23/09/82 25/06/81
SE 453236 B	18/01/88	AT 378287 A CH 657482 A,B DE 3200366 A FR 2499306 A,B SE 8200303 A	10/07/85 29/08/86 09/12/82 06/08/82 31/07/82
US 4091139 A	23/05/78	BE 846361 A CA 1071480 A CH 607251 A DE 2641406 A GB 1565696 A JP 1047401 C JP 52036783 A JP 55041483 B	17/03/77 12/02/80 30/11/78 31/03/77 23/04/80 28/05/81 22/03/77 24/10/80